



PRINCE SPORTS GROUP, INC.
BORDENTOWN, NEW JERSEY
UNITED STATES of AMERICA

SI-118

DRAWN BY:
MF GUERZINI


ENGINEERING:
Jim Boverico 12/22/98

STRINGER APPR.:
David Clark 12-27-98

REVISION C / PCN#892

KEY

- M = Main String
 - X = Cross String
 - H = Head (top)
 - T = Throat
 - L = Left Side
 - R = Right Side
 - SS = Short Side
(1 piece stringing)
- 2PR = 2 Piece Stringing Required
- 2PO = 2 Piece Stringing Option

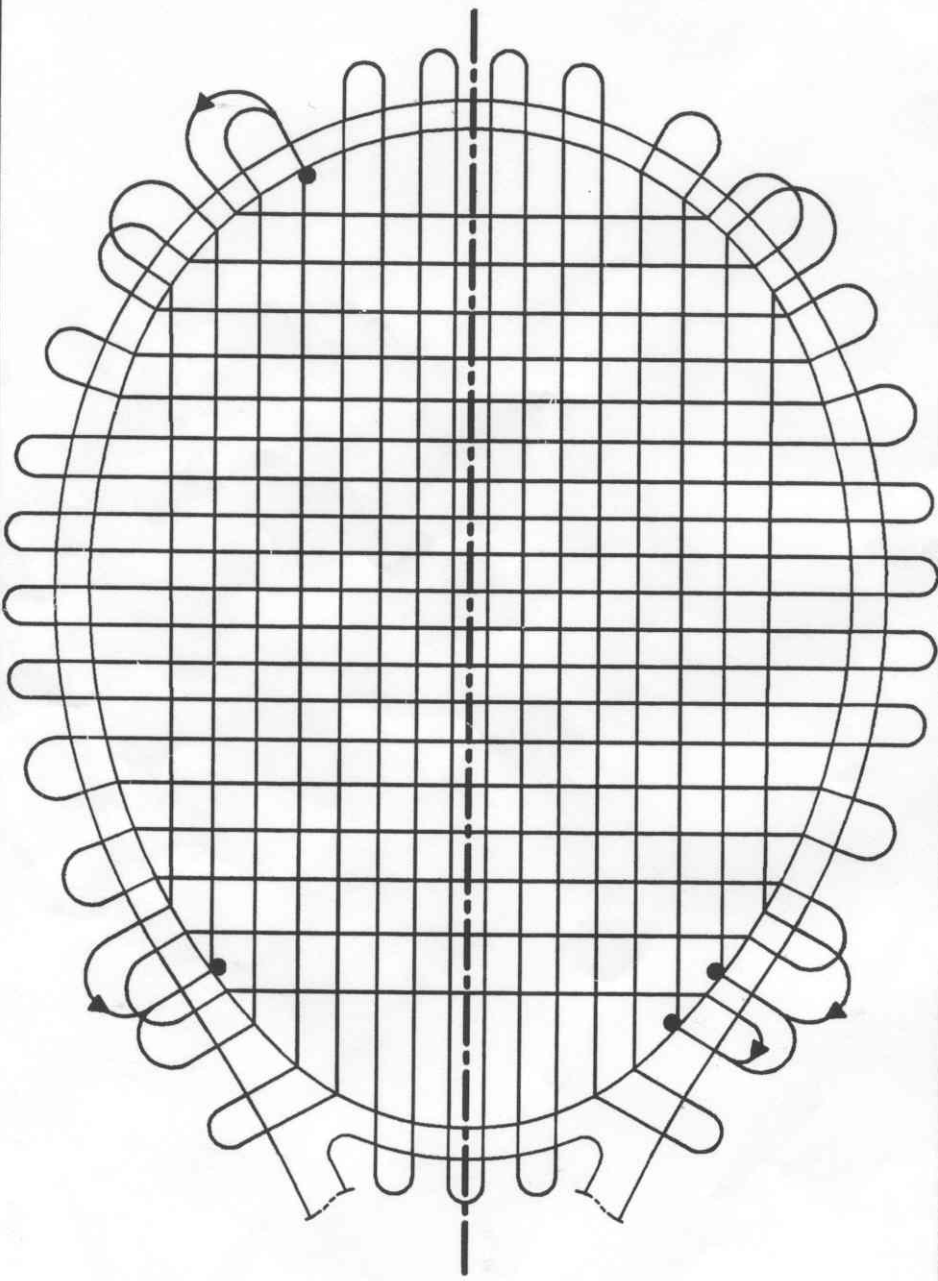

SI-118-A
Head Size 112 sq. in. & above
Length: 37', 19'M 18'X, 2PR

Tension: Power: 60 - 65 lbs.
Control: 66 - 70 lbs.

SI-118-B
Head Size 101 to 111 sq. in.
Length: 37', 19'M, 18'X, 2PR

Tension: Power: 57 - 62 lbs.
Control: 63 - 67 lbs.

SI-118-C
Light Weight Racquets
Length: 37', 19'M, 18'X, 2PR

Tension: Power: 50 - 55 lbs.
Control: 56 - 60 lbs.

SI-118-D
Super Light Weight Racquets
Length: 37', 19'M, 18'X, 2PR

Tension: Power: 40 - 45 lbs.
Control: 46 - 50 lbs.

Pattern: 16M x 19X

Start M's at throat. M's skip 7H, 9H, 7T and 9T. No shared holes.
Start X's at 7H.
Bottom X: 7T

Tie Off: M's at 8T,
X's at 5H and 6T.

NOTES:
Prince requires X's to be installed from top to bottom on all its racquets. Beware, bottom to top installation of X's will void the warranty.

THIS DOCUMENT AND THE INFORMATION IT CONTAINS ARE THE EXCLUSIVE PROPERTY OF PRINCE SPORTS GROUP, INC., AND ARE PROPRIETARY AND CONFIDENTIAL. NEITHER THIS DOCUMENT NOR ANY OF THE INFORMATION CONTAINED IN IT MAY BE USED BY YOU FOR ANY PURPOSE WHATSOEVER, NOR REPRODUCED OR DISCLOSED BY YOU TO OTHERS, EXCEPT WITH THE EXPRESS PRIOR WRITTEN CONSENT OF PRINCE SPORTS GROUP, INC.